

MO - 2012



MO - 2012 SS

TECHNICAL SPECIFICATIONS	
Height range min. / max	640 mm / 840 mm
Lifting speed	8 mm/s
Total length	1880 mm (with head)
Total width	600 mm
Base size	920 mm / 540 mm
Input Power Supply	230 V 50/60 Hz. 110 V 50/60 Hz.
Weight capacity	170 Kgs.
Gross weight	130 Kgs.

[Please Note: Specification are subject to modifications, as per emerging market demands.]

Motorised Vertical Height Adjustment

enables the ophthalmologist to perform from a convenient, comfortable standing or sitting position.

Optimally Positioned Head Rest

with manually controlled up & down motion option allows the surgeon easy access to the patient, while offering the patient comfortable head positioning. Plus, there is ample leg room, and sufficient space for equipment foot pedals.

Noiseless Dc Motor-driven

Adjustable Wrist Support

Offers surgeons convenient stability during operations.

Built-in Head Low and Head Up Position ensures safety during emergencies.

OPHTHALMIC OPERATION TABLE

AVAILABLE COLOURS

R.Blue	1
Denim Blue	2
N.Blue	3
Purple	4
Voilet	5
FI.Violet	6
WALLABY	7
Maroon	8
Crainberry	9
Mango	10
Gold	11
Olive	12
Brown	13
S.Blue	14
FI Green	15
FI.Pink	16
Crainberry	17
Tabak	18
Dk. Grey	19
Lt. Beige	20
Lt.Grey	21
White	22
Black	23

Information published in this catalogue is subject to change without notification



No 1, Sivagangai Main Road, Veerapanjan, Madurai - 625 020.
Phone : 91 94892 12354, 73395 71000, 94896 90576
E.mail : info@aurolab.com / vignesh@aurolab.com Web : www.aurolab.com

ARAVINDEYECARES SYSTEM

CHAIR UNIT & OT TABLES



CHAIR UNIT


Fully comfortable rotating chair,
Silent CE marked DC motor
gives smooth up-down & back-forward
movement, Adjustable footrest
which can be fully raised to
sleeping position, Foot switch for
chair up/down movement control.
(Available in Right hand (Standard)
& Left Hand models)



LED touch panel




Luxurious leather finish

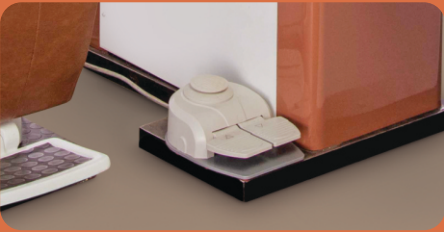

Multifunction footswitch
(controls patient chair & phorptor arm)



control the unit trough “APP”

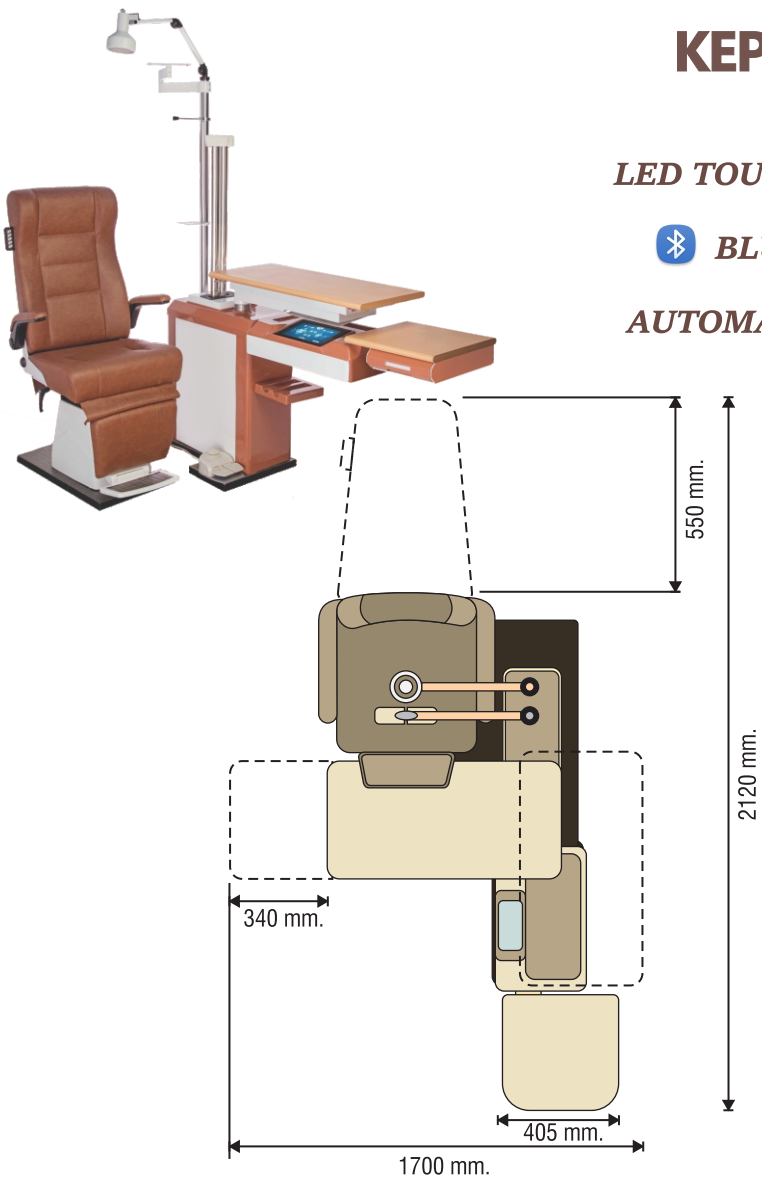

TECHNICAL SPECIFICATIONS	
Chair height Min./Max.	560 / 760mm
Chair Elevation Stroke	200 mm
Instrument Table Height	875 mm
Maximum Area Required	2120 x 1700 mm in erect position
Back-rest	Motorized
Table Top Size	32” x 16”
Rotation	180 circular
Load Lifting Capacity	175 kgs.
Auxiliary Output	230v 50 Hz/ 4 connection
Voltage on table	6v/12v/15v
Power Supply	230 v / 110 v 50/60 Hz
Gross Weight	260 Kgs.

Please Note : Specification are subject to modifications, as per emerging market demands.

KEPLER-17

LED TOUCH PANEL

BLUE TOOTH

AUTOMATED ARM

CHAIR UNIT


Fully comfortable rotating chair,
Silent CE marked DC motor
gives smooth up-down & back-forward
movement, Adjustable footrest
which can be fully raised to
sleeping position, Foot switch for
chair up/down movement control.
(Available in Right hand (Standard)
& Left Hand models)



Trail Set Storage



Writing Table With Mini Storage

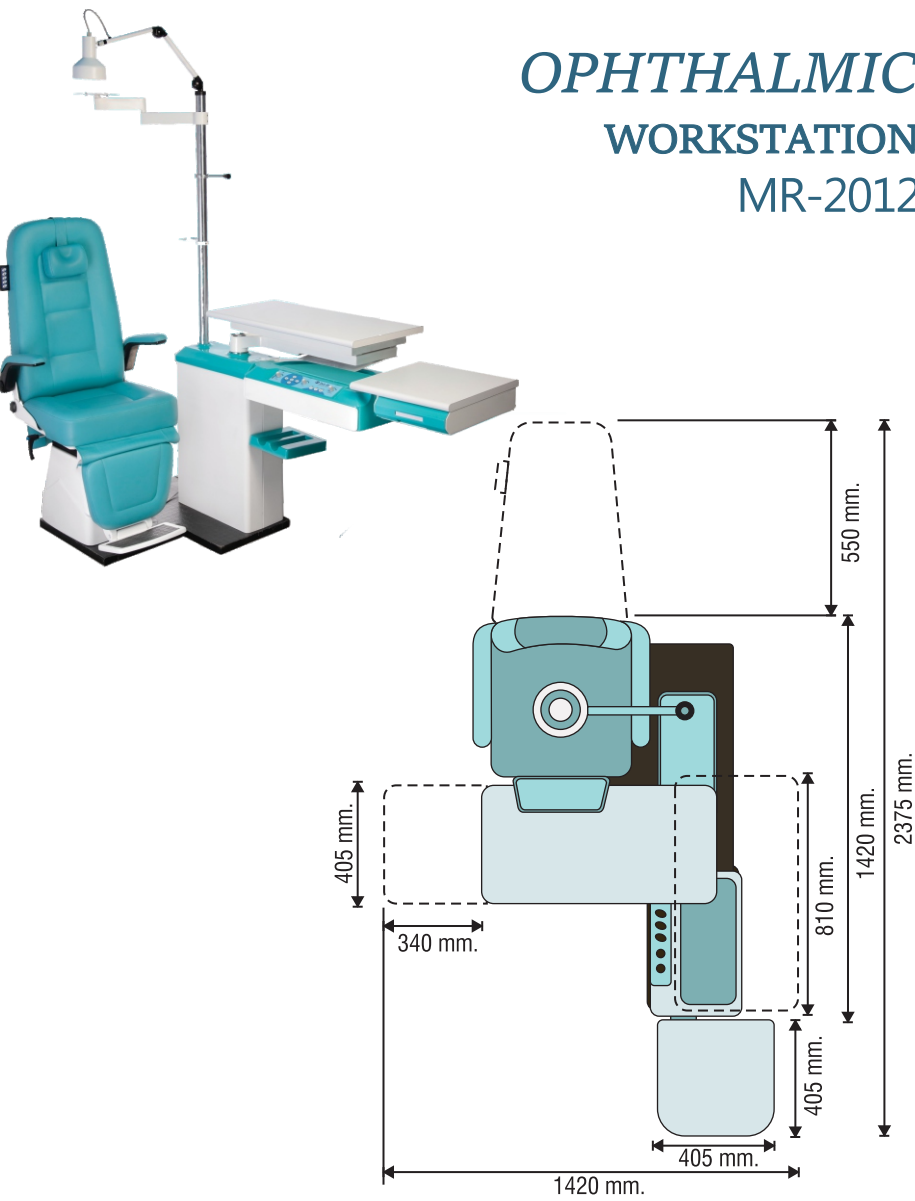

TECHNICAL SPECIFICATIONS	
Chair height Min./Max.	560 / 760mm
Chair Elevation Stroke	200 mm
Instrument Table Height	875 mm
Maximum Area Required	1450 x 1250 mm in erect position (Without Writing Pad)
Back-rest	Motorized
Table Top Size	32” x 16”
Rotation	180 circular
Load Lifting Capacity	175 kgs.
Auxiliary Output	230v 50 Hz/ 4 connection
Voltage on table	3v/6v/7.5v/9v/12v/15v
Power Supply	230 v 50/60 Hz 5 Amp.
Gross Weight	240 Kgs.


Please Note : Specification are subject to modifications, as per emerging market demands.

OPHTHALMIC
WORKSTATION
MR-2012

Optional Instrument




Visual Acuity Chart
Model : Aurochart

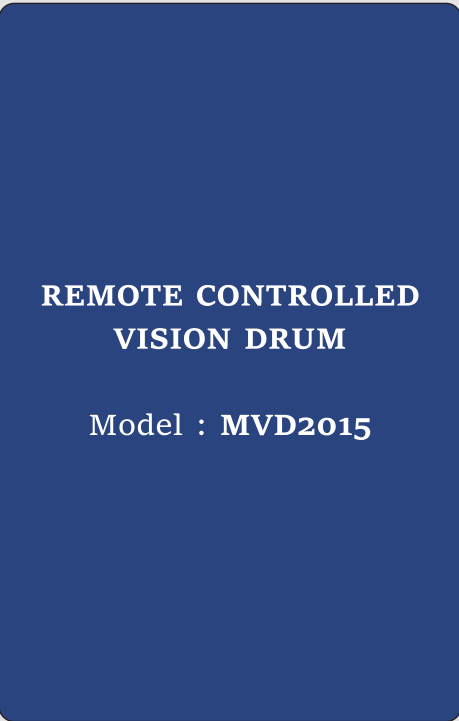

REMOTE CONTROLLED
VISION DRUM

Model : MVD2015

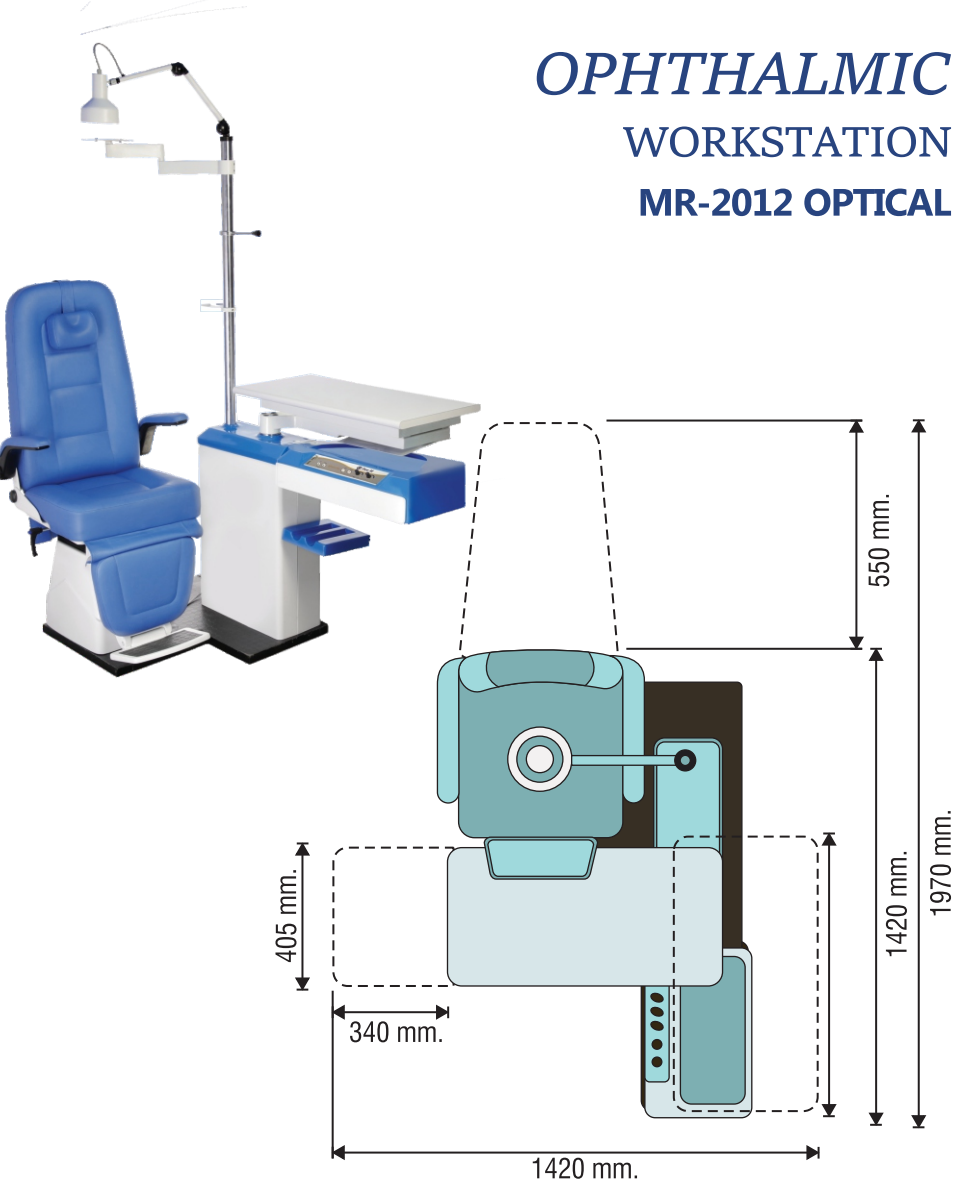

TECHNICAL SPECIFICATIONS	
Chair height Min./Max.	560 / 760mm
Chair Elevation Stroke	200 mm
Instrument Table Height	875 mm
Maximum Area Required	1450 x 1250 mm in erect position
Back-rest	Manual
Table Top Size	32” x 16”
Rotation	180 circular
Load Lifting Capacity	175 kgs.
Auxiliary Output	230v 50 Hz/ 4 connection
Voltage on table	3v/6v/7.5v/9v/12v/15v
Power Supply	230 v 50/60 Hz 5 Amp.
Gross Weight	235 Kgs.

Please Note : Specification are subject to modifications, as per emerging market demands.

OPHTHALMIC
WORKSTATION
MR-2012 OPTICAL